


Godox



FL15Bi

使用手册

Instruction Manual V1.1

固件 Firmware V1.00

重要安全说明

使用前请务必仔细阅读本手册，并严格遵守以下安全注意事项。

危险


- 若外壳出现开裂、变形、进液、异味或异常发热等情况，请立即停止使用。
- 仅限使用原厂配件，或经制造商明确推荐的配件；否则可能导致火灾、电击或人身伤害。
- 如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换，仅维修人员可更换，非一般人员更换。请勿拆卸产品或拆解电池。
- 电池不得暴露在诸如日照，火烤或类似过热环境中，产品不得淋雨、进水。
- 消费者若使用电源适配器充电，则应购买配套使用获得 CCC 认证并满足标准要求的电源适配器。
- 电池禁止拆解、撞击、挤压或投入火中。若出现严重鼓胀，请勿继续使用。请勿置于高温环境中。浸水后禁止使用。
- 使用时，应放置在易散热的地方，不要放置在床头、被褥上、包裹里或其他不易散热的环境中使用，避免婴幼儿接触玩耍，儿童请在成人指导下使用。

警告

- 不使用时应关机并断开所有线缆，存放在通风干燥、无强磁场干扰的环境中。
- 严禁在酒精、汽油等易燃易爆气体或溶剂附近使用本设备。
- 严禁覆盖散热孔。
- 严禁私自拆卸或改装设备。非授权拆解可能导致电路故障或永久性损坏。如需维修，请联系神牛授权服务中心。

请勿直视光源

物品清单



灯体 ×1



变焦透镜 ×1



四叶挡光板 ×1



硅胶套 ×1



USB-C 充电线 ×1



使用手册 ×1

注：1. 开箱后核对所购套装内的物品，若有缺失或破损，及时联系经销商。


2. 图示仅供参考，具体以实际产品为准。

另购物品



透镜反光杯 LM-L5

部件名称

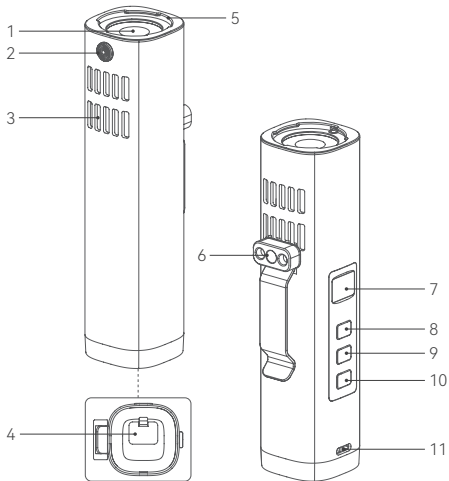

附件安装

变焦透镜: 对准灯头卡口插入, 顺时针旋转安装; 如需拆卸, 下推卡口释放键, 同时逆时针旋转变焦透镜即可。

四叶挡光板: 磁吸设计, 吸附于变焦透镜。

灯架 (另购): 将灯体 1/4" 螺纹孔对准灯架装入, 顺时针旋转锁紧。

电源管理

首次使用: 连接 USB-C 充电线以激活并开启设备。

开机: 长按电源键, 显示屏亮起。

关机: 再次长按电源键, 显示屏熄灭。

充电: 充电线接通电源, 另一端插入灯体 USB-C 接口。

模式选择

短按两次模式键, 切换 CCT/TORCH/BLE 模式。

CCT 模式

显示屏出现“CCT”进入色温模式, 短按一次模式键切换亮度 (0% ~ 100%) / 色温 (2800K ~ 6500K), 短按 < + > 或 < - > 键可增减参数值。



TORCH 模式

显示屏出现“TORCH”进入手电筒模式，短按一次模式键切换亮灯 ON（长按 <+> 亮灯，松开灭灯）/ 亮度（0% ~ 100%）/ 色温（2800K ~ 6500K），短按 <+> 或 <-> 键可增减参数值。

注 <+/-> 键调节参数值时，短按慢调，长按可快调。



BLE 模式

显示屏出现“BLE”进入蓝牙模式（长按 <+> 蓝牙重置），下方查看蓝牙 MAC 码，方便查找灯具。



“Godox Light”应用程序连接指南

扫描二维码，或在应用商店搜索“Godox Light”下载安装。

1. 蓝牙重置：进入 BLE 模式 > 重置并确认。
2. 蓝牙配对：打开应用程序，点击右上角“+”选择“蓝牙添加”，搜索并连接设备。



FX 模式

光效	亮度	色温	速度	其他
闪光灯	0% -100%	2800K-6500K	1-100	模式：闪光灯 / 镁光灯 触发：自动 / 手动
雷闪电		2800K-6500K	/	闪烁次数：随机 /1-10 频率：随机 /2-20 触发：自动 / 手动
多云		/	随机 /1-100	亮暗比例：30%-90%
坏灯泡		2800K-6500K	1-100	/
电视机		/	1-100	/
蜡烛		/	1-100	/
火		/	1-100	/
烟花		/	1-100	余烬：1-100
爆炸		2800K-6500K	1-100	余烬：1-100 触发：自动 / 手动
焊接		2800K-6500K	1-100	/
SOS		2800K-6500K	/	/

注：FX 模式仅限应用程序内使用，设置光效参数时，FL15Bi 仅显示光效类型。

固件升级

1. 在官网 (<https://www.godox.com.cn>) 下载固件升级软件 G3 和对应的产品固件 (.bin)。
2. 电脑接口与灯体的 USB-C 接口通过另购的数据线连接。
3. 将 G3 应用程序打开,点击打开文件打开.bin 文件,点击升级,等待升级完成。

照度数据

色温	测试条件	照度单位	0.5m	1m	2m
2800K	裸灯	lux	1280	339	89
		fc	119	31	8
	搭配变焦透镜（泛光）	lux	2380	653	166
		fc	221	61	15
	搭配变焦透镜（聚光）	lux	20500	6880	1690
		fc	1904	639	157
3200K	裸灯	lux	1340	352	93
		fc	124	33	9
	搭配变焦透镜（泛光）	lux	2470	680	172
		fc	229	63	16
	搭配变焦透镜（聚光）	lux	21500	7150	1750
		fc	1997	664	163
4300K	裸灯	lux	1420	374	97
		fc	132	35	9
	搭配变焦透镜（泛光）	lux	2620	719	182
		fc	243	67	17
	搭配变焦透镜（聚光）	lux	22800	7550	1850
		fc	2118	701	172
5600K	裸灯	lux	1590	420	110
		fc	148	39	10
	搭配变焦透镜（泛光）	lux	2950	808	205
		fc	274	75	19
	搭配变焦透镜（聚光）	lux	25600	8440	2070
		fc	2378	784	192

6500K	裸灯	lux	1670	441	115
		fc	155	41	11
	搭配变焦透镜（泛光）	lux	3100	849	215
		fc	288	79	20
	搭配变焦透镜（聚光）	lux	26900	8850	2170
		fc	2499	822	202

注：文中数据均为 100% 亮度下的平均测试值。

技术参数

产品名称	神牛双色温 LED 影视手电筒
产品型号	FL15Bi
锂电池	3.63V, 4750mAh, 17.2425Wh
	充电时间≈ 2 小时 25 分钟
	满电续航≈ 1 小时 (100% 亮度)
USB-C 接口	输入: 5V=3A, 9V=2A, 17W (Max.)
亮度范围	0% ~ 100%
色温范围	2800K ~ 6500K
CRI	≈ 97
TLCI	≈ 98
防护等级	IP54
蓝牙控制距离	最远 30 米
工作环境温度	-10°C ~ 35°C
尺寸 (不含附件)	45 × 36 × 145mm
净重 (不含附件)	≈ 253g

注: 产品设计与规格如有变更, 恕不另行通知。

维护保养

- 清洁前务必关机并断开电源。仅可使用干燥软布擦拭, 严禁使用酒精、苯或其他挥发性溶剂。
- 为延长电池寿命, 长期闲置时须每 3 个月进行维护性充电, 建议电量保持在 40%-60%。

Important Safety Instructions

Read this manual thoroughly before use and strictly observe the following safety precautions.




DANGER


- Stop using the product immediately if the housing is cracked or deformed, if liquid enters the device, or if it emits a strange odor or becomes abnormally hot.
- Use only original Godox accessories or accessories specified by the manufacturer. Failure to do so may result in fire, electric shock, or personal injury.
- Danger of explosion if the battery are not replaced properly, danger of fire or explosion if replaced with the wrong type of battery pack, replace only with battery of the same type or equivalent. Battery replacement must be performed by authorized service personnel only. Do not disassemble the product or disassemble the battery.
- The battery must not be exposed to conditions such as sunlight, fire, or similar excessive heat. Do not expose to rain or water.
- When charging, use a power adapter that meets certified safety standards.
- The Battery is not allowed to be disassembled, hit, crushed or thrown into fire. Do not continue to use if it is seriously swollen.
Do not place in a high temperature environment. Do not use after immersion in water.
- When using, it should be placed in a place where it is easy to dissipate heat, and should not be placed on the bedside, bedding, in a package or other environments that are not easy to dissipate heat. Keep out of contact with infants and young children, and children should use under adult guidance.

WARNING

- Do not operate near flammable gases or liquids (e.g., alcohol, gasoline).
- Do not block ventilation areas.
- Do not disassemble or modify the device without authorization.
- Unauthorized disassembly may result in circuit malfunction or permanent damage. Contact an authorized Godox service center for repairs.

 **Do not stare at the operating light source.**

What's Inside



Light Body x1



Zoom Lens x1



Barndoor x1



Silicone Sleeve x1



USB-C Charging Cable
x1



Instruction Manual x1

Note: 1. Check the package contents after unboxing. If any items are missing or damaged, contact the dealer immediately.


2. Illustrations are for reference only and may differ from the actual product.

Separately Sold Accessories



Zoom lens reflector LM-L5

Names of Parts

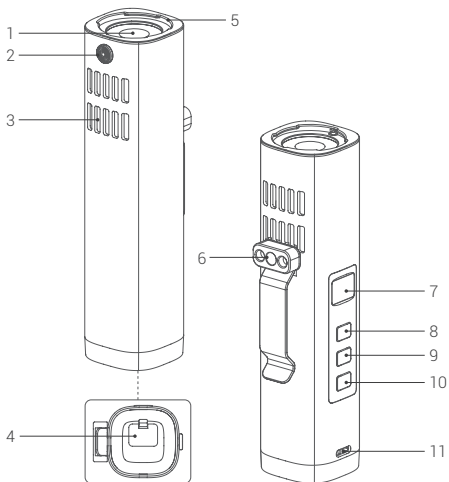

1. LED Beads

2. Mount Release Button

3. Cooling Vent

4. USB-C Port

5. Light Head Mount

6. 1/4" Threaded Hole

7. Display

8. <+> Button

9. <-> Button

10. Mode/Power Button

11. Lanyard Hole

Installation of Accessories

Zoom Lens: Align the zoom lens with the mount and rotate clockwise to install. Push the Mount release button and rotate counterclockwise to remove the zoom lens.

Barndoor: Magnetic design to be attached to the zoom lens directly.
Light Stand (Sold Separately): Mount the light onto the light stand via the 1/4" threaded hole and turn it clockwise to tighten.

Power Management

First Use: Connect the USB-C charging cable to activate and power on the device.

Power on: Press and hold the power switch button until the screen turns on.

Power off: Press and hold the power switch button until the screen turns off.

Charging: Connect the USB-C port on the light body to the power source with the attached charging cable to charge it.

Mode Selection

Press the mode button twice to switch among CCT, TORCH and BLE modes.

CCT Mode

The "CCT" icon will be displayed on the screen in CCT mode, press the mode button to switch between DIM (0% ~ 100%) and CCT (2800K ~ 6500K) adjustments, press the < + > button or < - > button can increase or decrease the parameters.



TORCH Mode

The "TORCH" icon will be displayed on the screen in TORCH mode, press the mode button to switch among ON (press and hold the < + > button to light up, release to light off), DIM adjustment (0% ~ 100%) and CCT adjustment (2800K ~ 6500K), press the < + > button or < - > button can increase or decrease the parameters.

Note: Press the < +/- > button can adjust the parameters slowly, while press and hold can adjust quickly.



BLE Mode

The "BLE" icon will be displayed on the screen in BLE mode (press and hold the < + > button to reset the Bluetooth), the MAC code is on the corner for quick check.



"GODOX Light" App Connection Guide

Scan the QR code or search for "Godox Light" in the App Store to download.

1. Reset Bluetooth: Enter BLE Mode > Reset and confirm.



- Bluetooth Pairing: Open the App, tap "+" in the top right corner, select "Add Bluetooth", then search for and connect the device.

FX Mode

Effect	DIM	Color	Speed	Others
Flash	0% - 100%	2800K-6500K	1-100	Mode: Camera Flash/Flash Bulb Trigger: Auto/Manual
Lightning		2800K-6500K	/	Times: Random/1-10 Frequency: Random /2-20 Trigger: Auto/Manual
Cloudy		/	Random/ 1-100	Ratio: 30% -90%
Broken Bulb		2800K-6500K	1-100	/
TV		/	1-100	/
Candle		/	1-100	/
Fire		/	1-100	/
Firework		/	1-100	Ember: 1-100
Explosion		2800K-6500K	1-100	Ember: 1-100 Trigger: Auto/Manual
Welding		2800K-6500K	1-100	/
SOS		2800K-6500K	/	/

Note: FX mode is only available for app use. When adjusting parameters, the FL15Bi displays the effect type only.

Firmware Upgrade

1. Download the G3 firmware upgrade software and the corresponding product firmware (.bin) from official website (<https://www.godox.com>).
2. Connect the computer to the USB-C port on the light using a USB cable (sold separately).
3. Turn on the G3 software, load the .bin file, then choose to upgrade the firmware.

Illuminance Data

CCT	Testing	Unit	0.5m	1m	2m
2800K	Bare Light	lux	1280	339	89
		fc	119	31	8
	With Zoom Lens (Flood)	lux	2380	653	166
		fc	221	61	15
	With Zoom Lens (Spot)	lux	20500	6880	1690
		fc	1904	639	157
3200K	Bare Light	lux	1340	352	93
		fc	124	33	9
	With Zoom Lens (Flood)	lux	2470	680	172
		fc	229	63	16
	With Zoom Lens (Spot)	lux	21500	7150	1750
		fc	1997	664	163
4300K	Bare Light	lux	1420	374	97
		fc	132	35	9
	With Zoom Lens (Flood)	lux	2620	719	182
		fc	243	67	17
	With Zoom Lens (Spot)	lux	22800	7550	1850
		fc	2118	701	172

5600K	Bare Light	lux	1590	420	110
		fc	148	39	10
	With Zoom Lens (Flood)	lux	2950	808	205
		fc	274	75	19
	With Zoom Lens (Spot)	lux	25600	8440	2070
		fc	2378	784	192
6500K	Bare Light	lux	1670	441	115
		fc	155	41	11
	With Zoom Lens (Flood)	lux	3100	849	215
		fc	288	79	20
	With Zoom Lens (Spot)	lux	26900	8850	2170
		fc	2499	822	202

Note: All data are average values measured at 100% brightness.

Technical Data

Product Name	Godox Bi-color LED Video Flash Light
Product Model	FL15Bi
Lithium Battery	3.63V, 4750mAh, 17.2425Wh
	Charging Time \approx 2h25min
	Runtime \approx 1h (100% brightness)
USB-C Port	Input: 5V \equiv 3A, 9V \equiv 2A, 17W (Max.)
Brightness Range	0% \sim 100%
CCT Range	2800K \sim 6500K
CRI	\approx 97
TLCI	\approx 98
Ingress Protection Rating	IP54
Bluetooth Control Distance	Max.30m
Working Environment Temperature	-10 \sim 35°C
Dimension (without accessories)	1.77*1.42*5.71"
Net Weight (without accessories)	\approx 253g

Note: Design and specifications are subject to change without notice.

Maintenance

- Power off and disconnect the power supply before cleaning. Use a dry, soft cloth only. Strictly do not use alcohol, benzene, or other volatile solvents.
- To extend battery life, perform a maintenance charge every 3 months during long-term storage. It is recommended to keep the battery level at 40% - 60%.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. The use distance is not more than 5mm.

Warning

Operating frequency: 2402MHz – 2480MHz(BT)

Maximum EIRP Power: 3.13dBm(BT)

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:

<https://www.godox.com/eu-declaration-of-conformity/>

The device complies with RF specifications when the device used at 0mm from your body.

IC Warning

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes RSS exemptées de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes:

- (1) Cet appareil ne peut pas causer d'interférences, et
- (2) Cet appareil doit accepter toute interférence, y compris celles qui pourraient entraîner un fonctionnement accidentel de l'appareil.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États - Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions. Cependant, aucune Garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:

- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espacement entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Avertissement RF pour les appareils portables:

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences.Équipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

产品保修

尊敬的用户，本保修卡是申请保修服务的重要凭证，请您配合销售商填写并妥善保管，谢谢！

产品信息	型号	产品条码
用户信息	姓名	联系电话
	通信地址	
销售商信息	名称	
	联系电话	
	通信地址	
	销售日期	
备注		

注：此表应由销售商盖章确认。

适用产品

本文件适用于相关《产品保修资讯》（见后面说明）所列产品，其他非属此范围的产品或部件（如促销品、赠品及其他出厂后附加的部件等）不在此保修承诺内。

保修期

产品及部件的相应保修期按相关的产品保修信息执行。保修期自产品首次购买日起算，购买日以购买产品时保修卡登记日期为准。

如何获得保修服务

您可直接与产品销售商或授权服务机构联系，也可拨打神牛产品售后服务电话，与我们联系，由我们的服务人员为您安排服务。申请保修时，您应提供有效的

保修卡作为保修凭证，方可获得保修。如您不能提供有效的保修卡，则在我们确认产品或部件属于保修范围的情况下，也可以为您提供保修，但这不作为我们的义务。

不适用保修情况

如产品存在下列情况，本文件项下的保证和服务将不适用：①产品或部件超过相应保修期；②错误或或不适当使用、维护或保管导致的故障或损坏，如：不当搬运；非按产品合理预期用途使用；不当插拔外接设备；跌落或外力挤压；接触或暴露于不适当温度、溶剂、酸碱、水浸或潮湿环境；③由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏；④产品或部件原有识别信息被修改变更或删除；⑤无有效保修卡；⑥使用非合法授权、非标准或非公开发行的软件造成的故障或损坏；⑦因不可抗力或意外事件造成的故障或损坏；⑧其他非因产品本身质量问题导致的故障或损坏。遇上述情况，您应向相关责任方寻求解决，神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的，不是保修范围内的故障。产品使用过程中正常的脱色，磨损和消耗，不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

类别	名称	保修期(月)	保修服务类型
带电性能的 部件	电路板	12	客户送修
其他	光效附件、各类线材、 或其他包装	无	无保修

神牛产品售后服务电话：0755-29609320-8062

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product	Model	Product Code Number
Information	Name	Contact Number
Customer	Address	
Information	Name	
	Contact Number	
Seller	Address	
Information	Date of Sale	
Note:		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time, And the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ① . **The product or accessory has expired its warranty period;** ② . **Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc;** ③ . **Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment;** ④ . **The original identifying information of product or accessory is modified, alternated, or removed;** ⑤ . **No valid warranty card;** ⑥ . **Breakage or damage caused by using illegally authorized, nonstandard or non-public released software;** ⑦ . **Breakage or damage caused by force majeure or accident;** ⑧ . **Breakage or damage that could not be attributed to the product itself.** Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts with electrical properties	Circuit board	12	Customer sends the product to designated site
Other Items	Optical accessories, cables, or other packages, etc.	NO	Without warranty

Godox After-sale Service Call 0755-29609320-8062



Wechat
Official Account
神牛微信公众号

制造商：深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区耀川工业区厂房 2 栋

电话：0755-29609320(8062) 传真：0755-25723423

邮箱：godox@godox.com 网址：Godox.com

MANUFACTURER: GODOX Photo Equipment Co., Ltd.

add.: Building 2, Yaochuan Industrial Zone, Shenzhen 518103, China

Tel: +86-755-29609320(8062) Fax: +86-755-25723423

E-mail: godox@godox.com Website: Godox.com



Copyright © 2026 Godox All Rights Reserved.

中国制造 Made in China | 705-FL1580-01