


Godox



ES01

Instruction Manual 使用手册

重要安全说明

使用前请务必仔细阅读本手册，并严格遵守以下安全注意事项。

⚠ 危险

- 若外壳出现开裂、变形、进液、异味或异常发热等情况，请立即停止使用。
- 仅限使用原厂配件，或经制造商明确推荐的配件；否则可能导致火灾、电击或人身伤害。
- 本设备不具备防水防尘功能，禁止在雨天、高湿度、多尘环境中使用。
- 若设备进水或受潮，请立即切断电源，并断开所有连接线缆。
- 严禁在酒精、汽油等易燃易爆气体或液体附近使用本设备。
- 严禁私自拆卸或改装设备。非授权拆解易导致电路故障或永久性损坏。如需维修，请联系神牛授权服务中心。

物品清单

ES01



ES01 K3




注：
1. 开箱后核对所购套装内的物品，若有缺失或破损，及时联系经销商。
2. 图示仅供参考，具体以实际产品为准。

另购物品



支架 AD-E2


部件名称

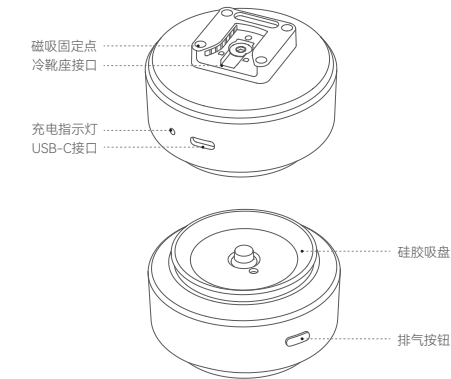

单吸盘使用 (承重 ≤ 0.6 kg)

iT32 闪光灯

底部触点对准冷靴座接口的条形凹槽，垂直下压即可自动磁吸固定。




ML40R摄影灯

装入1/4"冷靴座：对准冷靴座接口插入，顺时针旋转锁环直至拧紧。




装入灯具：1/4"螺纹孔对准冷靴座顶部螺纹柱，顺时针旋转直至拧紧。

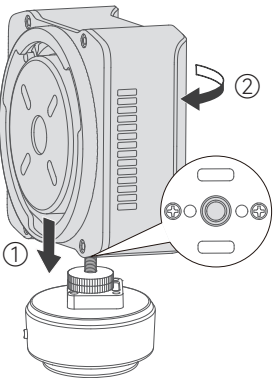


三吸盘组合使用 (承重 ≤ 2.0 kg)

ML150 RF摄影灯


拆除冷靴座接口：使用内六角扳手逆时针拧下螺丝，将其拆除。

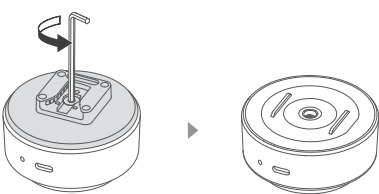


装入三灯连接件：对齐孔位，依次将三个电动吸盘通过螺丝固定在连接件上。



装入1/4"转换头：底部中心孔插入一颗螺丝，再放入转换头，顺时针旋转拧紧。

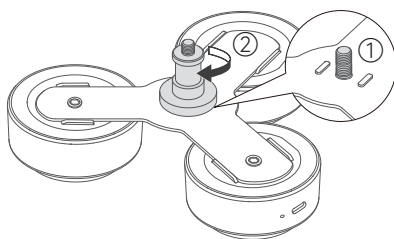


装入灯具：1/4"螺纹孔对准转换头螺纹柱，顺时针旋转直至拧紧。

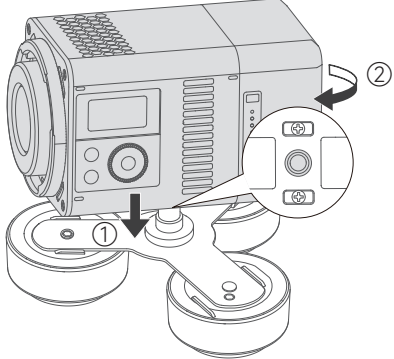


注：安装电动吸盘时，USB-C接口朝向外侧，便于后续充电操作。

真空吸附操作

启用：将硅胶吸盘贴于玻璃、瓷砖、车窗等平滑表面，垂直下压，自动吸附。

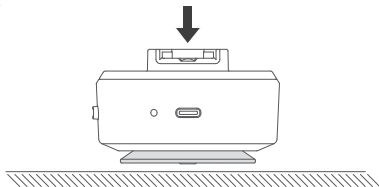

解除：短按排气按钮，解除吸盘吸附。

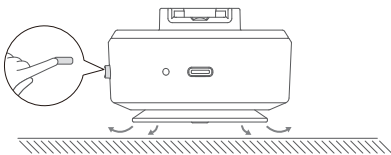

充电指示灯说明

指示灯状态	电动吸盘状态	操作提示
红灯闪烁	电量不足	充电：使用标配充电线连接设备与电源适配器（需另购）
红灯常亮	正在充电	充电过程中保持连接稳定
绿灯常亮	已充满电	可断开电源使用

技术参数

产品名称	神牛电动吸盘支架
产品型号	ES01
锂电池	3.8 V，200 mAh，0.76 Wh 充电时间 ≈ 1 小时
USB-C 接口	输入：5 V $\equiv$ 0.5 A
工作环境温度	-10°C~40°C
尺寸	68 × 68 × 42 mm
净重	≈ 69 g

注：产品设计与规格如有变更，恕不另行通知。

维护保养

- 清洁前务必断开电源，仅可使用干燥软布擦拭，严禁使用酒精、苯或其他挥发性溶剂。
- 为延长电池寿命，长期闲置时须每 3 个月进行维护性充电，建议电量保持在 40%-60%。

产品保修

尊敬的用户，本保修卡是申请保修服务的重要凭证，请您配合销售商填写并妥善保管，谢谢！

产品信息	型号	产品条形码
用户信息	姓名	联系电话
	通信地址	
销售商信息	名称	
	联系电话	
	通信地址	

注：此表应由销售商盖章确认。

适用产品

本文件适用于相关《产品保修信息》(见后面说明)所列产品，其他非属此范围的产品或部件(如促销品、赠品及其他出厂后附加的部件等)不在此保修承诺内。

保修期

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算，购买日以购买产品时保修卡登记日期为准。

如何获得保修服务

您可直接与产品销售商或授权服务机构联系，也可拨打神牛产品售后服务电话，与我们联系，由我们的服务人员为您安排服务。申请保修时，您应提供有效的保修卡作为保修凭证，方可获得保修。如您不能提供有效的保修卡，则在我们确认产品或部件属于保修范围的情况下，也可以为您提供保修，但这不作为我们的义务。

不适用保修情况

如产品存在下列情况，本文件项下的保证和服务将不适用：① 产品或部件超过相应保修期；② 错误或不适当使用、维护或保管导致的故障或损坏，如：不当搬运；非按产品合理预期用途使用；不当插拔外接设备；跌落或外力挤压；接触或暴露于不当温度、溶剂、酸碱、水浸或潮湿环境；③ 由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏；④ 产品或部件原有识别信息被修改或删除；⑤ 无有效保修卡；⑥ 使用非合法授权、非标准或非公开发行的软件造成的故障或损坏；⑦ 因不可抗力或意外事件造成的故障或损坏；⑧ 其他非因产品本身质量问题导致的故障或损坏。遇上述情况，您应向相关责任方寻求解决，神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的，不是保修范围内的故障。产品使用过程中正常的脱色、磨损和消耗，不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

部件	保修期 (月)	保修服务类型
内部电路板	12	客户送修
其他（例如光效附件、各类线材或其他包装）	无	无保修

神牛产品售后服务电话：0755-29609320-8062

Important Safety Instructions

Read this manual thoroughly before use and strictly observe the following safety precautions.

Danger


- Stop using the product immediately if the housing is cracked or deformed, if liquid enters the device, or if it emits a strange odor or becomes abnormally hot.
- Use only original Godox accessories or accessories specified by the manufacturer. Failure to do so may result in fire, electric shock, or personal injury.
- This device is NOT waterproof. Do not use in rain, high humidity, or dusty environments.
- If liquid enters the device or it becomes damp, disconnect the power immediately and remove all cables.
- Do not operate near flammable gases or liquids (e.g., alcohol, gasoline).
- Do not disassemble or modify the device without authorization. Unauthorized disassembly may result in circuit malfunction or permanent damage. Contact an authorized Godox service center for repairs.

What's Inside

ES01



ES01 K3

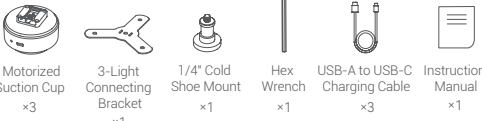


Note:
1. Check the package contents after unboxing. If any items are missing or damaged, contact the dealer immediately.
2. Illustrations are for reference only and may differ from the actual product.

Separately Sold Accessories




Name of Parts

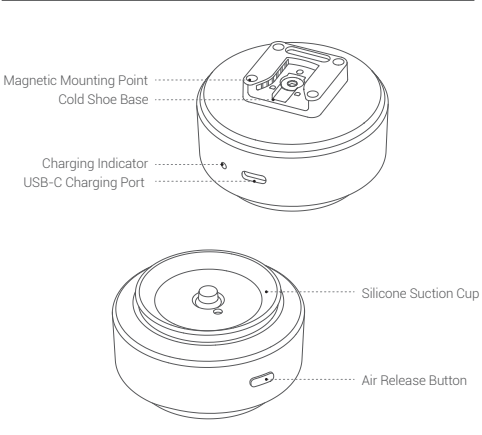

Single Suction Cup Usage (Load Capacity ≤ 0.6 kg)

iT32 Flash

Align the contacts at the bottom with the slot on the cold shoe mount. Press down vertically to attach magnetically.

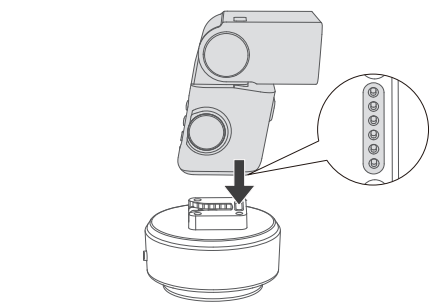


ML40R LED Video Light

Install the 1/4" Cold Shoe Mount: Align and insert it into the cold shoe mount interface. Turn the locking ring clockwise to tighten.




Install the Light: Align the 1/4" threaded hole with the screw on the cold shoe mount. Turn the light clockwise to tighten.

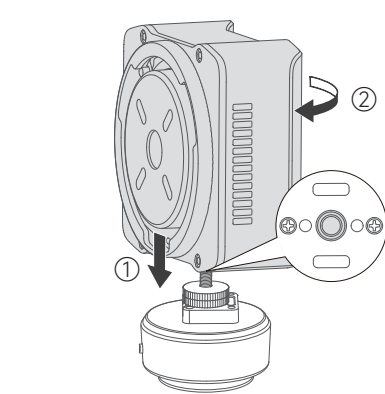


Triple Suction Cup Usage (Load Capacity ≤ 2.0 kg)

ML150 RF LED Video Light


Remove the Cold Shoe Interface: Use a hex wrench to remove the screw by turning it counter-clockwise, then detach the interface.

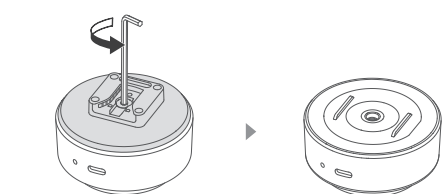

Install the Triple Mounting Plate: Align the holes and secure the three electric suction cups to the plate using screws one by one.

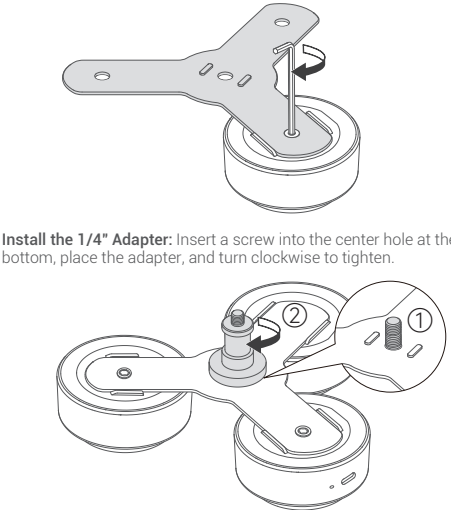


Install the Light: Align the 1/4" threaded hole with the screw on the adapter. Turn the light clockwise to tighten.

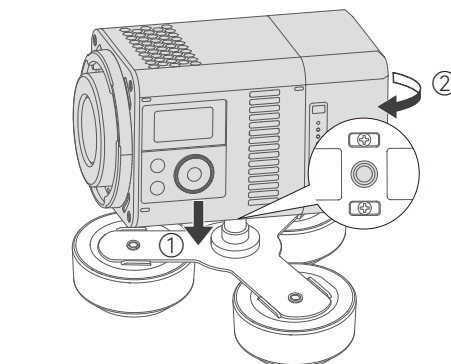


Note: When installing the electric suction cups, ensure the USB-C ports face outward for easy charging access.

Vacuum Adsorption Operation

Attach: Place the silicone suction cup to smooth surfaces (glass, tiles, car windows, etc.). Press down vertically to attach automatically.

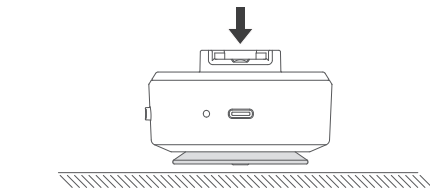

Release: Press the Release Button to release the suction.

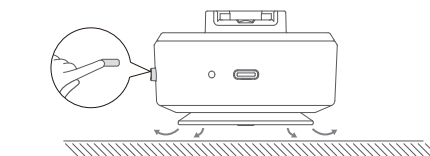

Charging Indicator Instruction

Indicator Status	Status	Operation Prompt
Red Light flashing	Low Battery	Charging: Connect the device to a power adapter (sold separately) using the included charging cable
Red light constant	Charging	Ensure the connection remains stable during charging
Green light constant	Fully Charged	Disconnect from power for use

Technical Data

Product Name	Godox Motorized Suction Holder
Product Model	ES01
Built-in Lithium Battery	3.8 V, 200 mAh, 0.76 Wh Charging Time ≈1 Hour
USB-C Port	5 V ⚡ 0.5 A
Working Temperature	-10°C~40°C
Dimensions	68 × 68 × 42 mm
Net Weight	≈ 69 g

Note: Specifications and data may subject to changes without notice.

Maintenance

- Power off and disconnect the power supply before cleaning. Use a dry, soft cloth only. Strictly do not use alcohol, benzene, or other volatile solvents.
- To maintain battery health, perform a maintenance charge every 3 months during long-term storage. It is recommended to keep the battery level at 40% - 60%.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive GPSR (EU)2023/988,2014/30/EU. They are allowed to be used in all EU member states.

For more information of DoC, Please click this web link:
<https://www.godox.com/eu-declaration-of-conformity/>

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time, And the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ① The product or accessory has expired its warranty period; ② Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contact or exposure to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③ Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alteration, addition and detachment; ④ The original identifying information of product or accessory is modified, altered, or removed; ⑤ No valid warranty card; ⑥ Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦ Breakage or damage caused by force majeure or accident; ⑧ Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Parts	Maintenance Period (month)	Warranty Service Type
Internal circuit board	12	Customer sends the product to designated site
Other items (optical accessories, cables, package, etc)	NO	Without warranty

Godox After-sale Service Call 0755-29609320-8062



深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区福川工业园厂房 2 栋
电话：0755-29609320 (8062) 传真：0755-25723423 邮箱：godox@godox.com

GODOX Photo Equipment Co., Ltd.

Add: Building 2, Yaoshuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China Tel: +86-755-29609320(8062)
Fax: +86-755-25723423 E-mail: godox@godox.com

www.godox.com
Made in China | 705-ES0100-00

